


SWEPAC

FOR A SOLID GROUND

CONCRETE EQUIPMENT

DURABLE AND RELIABLE EQUIPMENT FOR
CONCRETE TREATMENT.

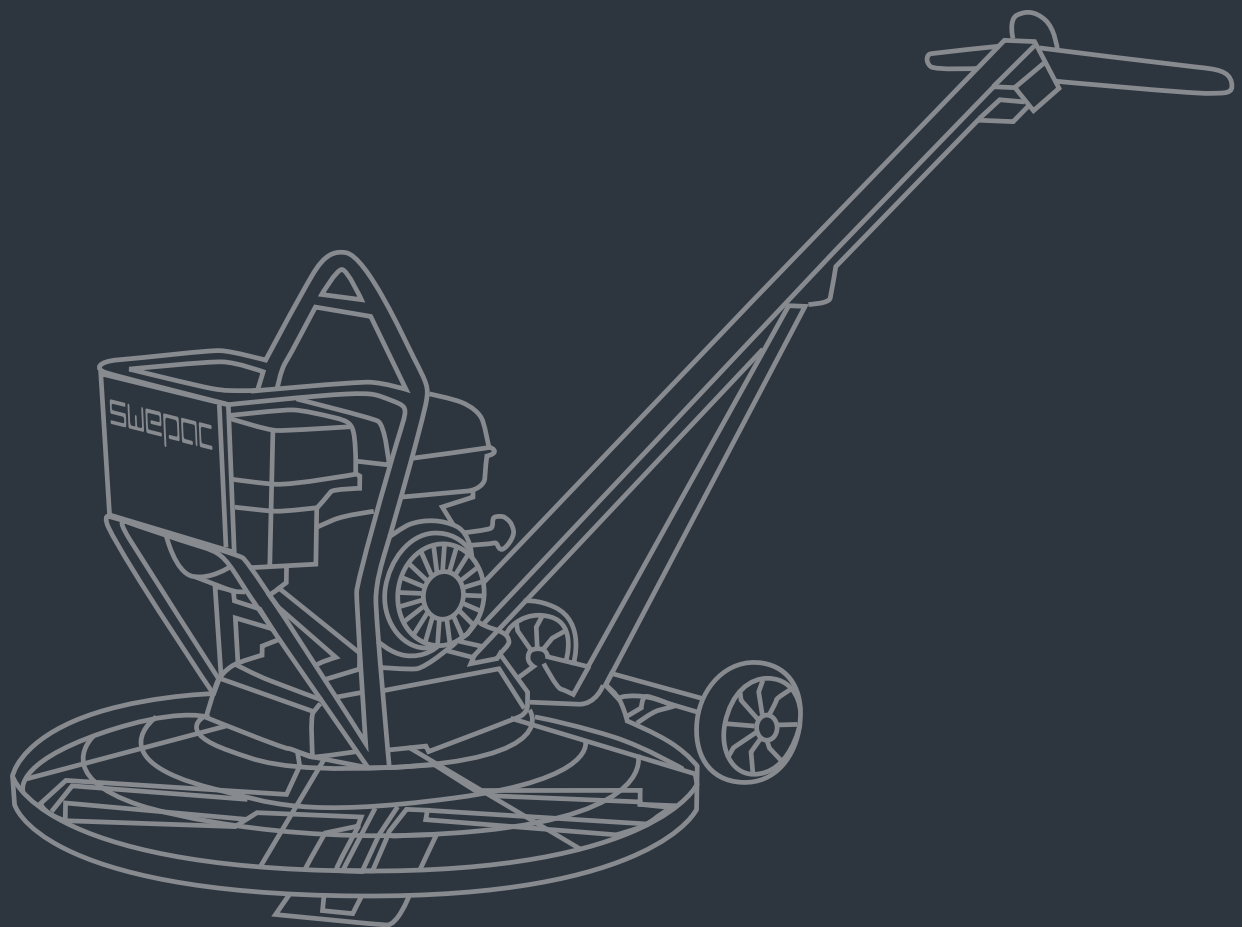

SWEE





INNOVATION AND QUALITY IN EVERY STEP

Responsiveness and long term focus characterize everything we do – and this applies to both products and working methods. Product development in close dialogue with our customers, personal service and efficient support result in innovative solutions that last over time.

Welcome to Swepac!

SWEPAC IS DRIVEN BY A STRONG AND GENUINE CUSTOMER FOCUS



Product durability and ease of use are some of our guiding principles, but overall, it is about us at Swepac understanding the needs our customers have and being able to translate them into reliable solutions. We listen, analyse, develop, and test. And test again, usually on-site with the customer. Customer-oriented development is a natural part of Swepac's operations. We know that our customers need high quality machines that do their job every day.

INNOVATIVE MACHINES FOR CONCRETE TREATMENT

MODERN AND COMPREHENSIVE CONCRETE PROGRAM

Swepac has a broad range of equipment for concrete treatment that complements the well-known and comprehensive range of compaction equipment.

This means that Swepac can offer a complete product portfolio for demanding customers – both contractors and rental companies.

MADE IN SWEDEN

Product development and manufacturing take place at our facility in Ljungby, Sweden. The design and development work is directed towards

products with well-thought-out function, ergonomics, high quality materials, caring for both environment and work environment.

HIGH QUALITY & DURABILITY

Swepac is certified according to ISO 9001 and 14001. But our ambitions are significantly higher than that. The main customer group consists of the most demanding companies - the rental companies. We closely follow developments in the area of concrete application, especially in

the method and technology side. In order to manufacture the best concrete equipment, a good knowledge of the construction methods in the concrete and construction sector is needed. This ensures that we develop professional and reliable products.

CLOSE DIALOGUE WITH CUSTOMERS PROVIDES A SOLID BASIS FOR DEVELOPMENT

The rental companies and their customers' demands on durability and product quality are high. They give us valuable feedback which we consi-

der when developing new products. We strive to be responsive and react quickly, all to drive development forward.

ERGONOMICS AND HEALTH IN FOCUS

Our machines have handles with low hand-arm-vibrations, reducing the risk of numbness and white

fingers. Noise levels are low to protect both the operator and the surrounding environment.



EQUIPMENT THAT EFFECTIVELY CONCRETE STRUCTURES AS WELL AS

POKER VIBRATORS

POKER VIBRATORS. When using a poker vibrator for concrete, air is forced up and out through the concrete surface, leaving the concrete dense and strong. The diameter of the poker is chosen according to the density and thickness of the concrete.

Swepac offers both mechanical and electrical poker vibrators in various diameters, as well as, rotary and electronic frequency converters. The product range also includes several poker vibrators with a built-in converter.

PVD 600



Drive unit: 600 W, 1-phase, 230 V
Fits: Flexible shaft 1/2/3/4 m and mechanical vibrator head: 28/38/45 mm

PVD 2000



Drive unit: 2 300 W, 1-phase, 230 V
Fits: Flexible shaft 1/2/3/4 m and mechanical vibrator head: 25/32/40/48/58 mm

PVC



Mechanical frequency converter
Power: 1.6 kVA (23A) 1-phase 230 V
Power: 1.6 kVA (23A) 3-phase 400 V
Power: 4.5 kVA (61A) 3-phase 400 V
Power: 6.0 kVA (82A) 3-phase 400 V
Fits: PVE and PVE-D

PVCE



Electronic frequency converter
Power: 1.5 kVA (21A) 1-phase 230 V
Power: 2.5 kVA (31A) 1-phase 230 V
Fits: PVE and PVE-D

PVEL



Electric poker with integrated converter. 1-phase, 230 V
Diameter head: 38/50/58/65 mm

PVEL-D



Electric poker with integrated converter with de-vibrated handle. 1-phase, 230 V
Diameter head: 38/50/58 mm

PVE



Electric poker.
For external converter PVC.
Diameter head: 38/50/58/65 mm

PVE-D



Poker with de-vibrated handle.
For external converter PVC.
Diameter head: 38/50/58 mm

PVD-BP

**BATTERY
POWERED**

by **BATTERYONE**

PVE-B



Battery converter backpack
Weight excl battery (BOB5): 4 kg
Weight incl battery (BOB5): 10 kg
Operating time (BOB5): up to 120 min
Charging time, std/fast charger: 50/90 min

PVE-DB



PVD-BP can be used with:
PVE-DB with devibrated handle, head diameters 38/50/58 mm
PVE-B with 1.5 or 3.0m hose, head diameters 38/50/58 mm



CONTRIBUTE TO STRONG

DURABLE AND FLAT CONCRETE FLOORS


SURFACE VIBRATORS

Just like the poker vibrators, the surface vibrators are used to reduce air pores in the concrete and thus create a denser and more wear-resistant concrete floor with a longer lifespan. Surface vibrators also provide a very flat floor. If an already laid concrete floor is to be covered with a new concrete floor, a surface vibrator is excellent to get extra good adhesion between the two concrete structures.

Swepac offers both fixed and modular beams, as well as finishing beams. The modular beam can be used for a variety of applications and, with its modular system, can be easily assembled/disassembled at the workplace. The modular beam provides a very precise surface and is recommended when the customer has high demands on the flatness of the concrete floor.


SURFACE VIBRATORS, FIXED BEAMS

SVF

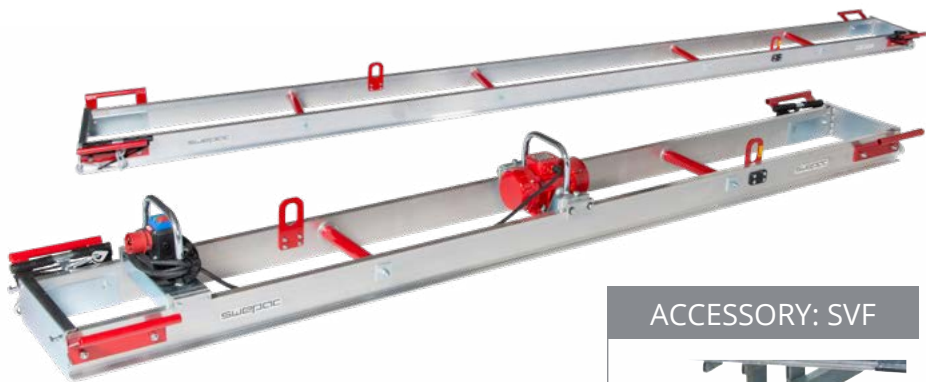

Unit beam up to 7.2 m.
Lengths: 3.2; 4.2; 5.2; 6.2; 7.2 m.

ACCESSORY: SVF



Skates with stepless adjustment,
from 30 – 150mm.

SV 23E



Floor vibrator (single beam)
Motor: EI, 1-phase
Centrifugal force: 1300 N
Frequency: Max 167 Hz
Aluminium profile: L 1.6-4.2 m

FINISHING BEAMS

FBP-FBE



Finishing beam, FBP (Petrol), FBE (EI)
Weight, drive unit 12.5 kg (P), 12 kg (E)
Motor: Honda GX25 (P) alt EI, 1-phase
Centrifugal force: 1500 resp 1300 N
Frequency: 9000 - resp 12000 vib/min
Aluminium profile: L 1.5-3 m

FBP-H



Finishing beam
Weight, drive unit 15 kg
Motor: Honda GX25 (petrol)
Centrifugal force: 1500 N
Frequency: 9000 vib/min
Aluminium profile: L 1.5-4 m

FBB-H

**BATTERY
POWERED**



Finishing beam, Battery powered,
Weight, drive unit 12 kg
Motor: external vibrator 24V,
Centrifugal force: 1400 N
Frequency: 5500 vib/min
Aluminium profile: L 2-5 m


SURFACE VIBRATOR, MODULAR BEAM

SVM 25

Surface vibrators, modular beam
Modular beam up to 25 meter
Sections: 0.5; 0.75; 1.00; 2.00; 3.00 m.

End unit: With hand winch
Drive unit E: Electricity 3 phase, 400 V with
hand winch

Drive unit P: Petrol with hand winch Engine:
Honda GX 200

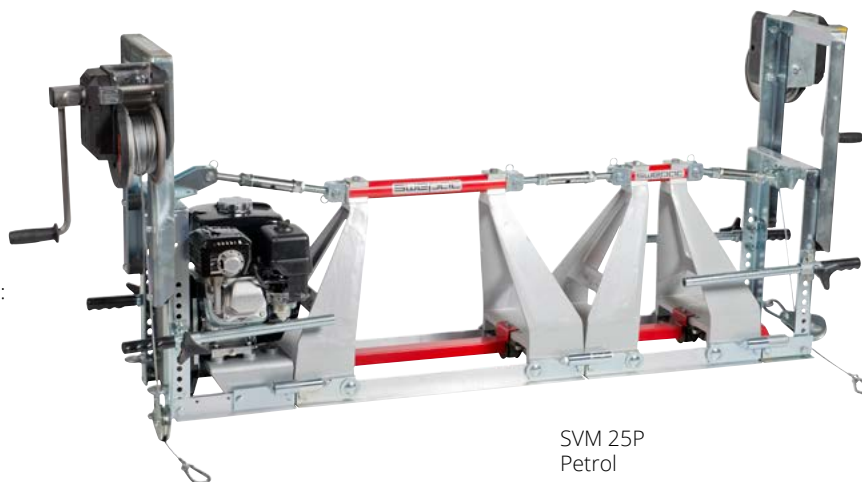

SVM 25P
Petrol



SVM 25E
Electric



3,0 m



1,0 m



2,0 m



0,75 m



0,5 m

SURFACE VIBRATOR, MODULAR BEAM

ACCESSORIES SVM 25



Electric winches, with 3 phase electric motor driven worm gears



A third winch for long beams



Outrigger U2 or U3 for track rail system



Skates with stepless adjustment



Extender, 0.5 m



Special connection set for making steeper slopes than standard connections



TROWELS

FINISHING. The purpose of finishing is to obtain an even and smooth concrete floor, an increased wear resistance and to reduce dusting afterwards from the drying surface. During this process, a further compaction and post-mixing of cement and sand grains is also obtained on the concrete surface, which strengthens the wear resistance of the floor.

Swepac offers a broad trowel program that covers the customers' needs. The machines come well equipped as standard but can be supplemented with accessories and alternative equipment to meet the specific wishes of the customer and operator.

TR 600E

TR 600P



TR 6000E
Weight: 63 kg
Diameter protection ring: 600 mm
Motor: Electric, 1-phase 230V
Motor output: 1.5 kW
Speed (drive shaft): 130 rpm

TR 600P
Weight: 65 kg
Diameter protection ring: 600 mm
Engine: Honda GX160 (petrol)
Engine output: 4.1 kW (5.5 hp)
Speed (drive shaft): 50-150 rpm

TR 750P



TR 750P
Weight: 68.5 kg
Diameter protection ring: 750 mm
Engine: Honda GX160 (petrol)
Engine output: 4.1 kW (5.5 hp)
Speed (drive shaft): 50-150 rpm

TR 950E

TR 950P



TR 950E
Weight: 84 kg
Diameter protection ring: 950 mm
Motor: Electric, 3-phase 400 V
Motor output: 2.5 kW
Speed (drive shaft): 40-130 rpm

TR 950P
Weight: 93 kg
Diameter protection ring: 950 mm
Engine: Honda GX200 (petrol)
Engine output: 4.8 kW (6.5 hp)
Speed (drive shaft): 50-150 rpm

HANDLE / BLADE SETTING

All models have screw pitch for blade setting.



Screw pitch

RIDE-ON TROWELS

TR 2000-HRH

SEMI-HYDRAULIC



Weight: 400 kg
Working diameter: 1905 x 935 mm
Diameter float pan: 1920 x 950 mm
Engine: Honda GX690 (petrol)
Engine output (motor): 16,5 kW (22,1 hp)
Speed, (output shaft): Max 165 rpm

Built-in transport wheel system

TR 2000-HRM

MECHANICAL



Weight: 285 kg
Working diameter: 1905 x 935 mm
Diameter float pan: 1920 x 950 mm
Engine: Honda GX690 (petrol)
Engine output (motor): 16,5 kW (22,1 hp)
Speed, (output shaft): Max 165 rpm



Option: Transport trolley



MADE IN SWEDEN


– QUALITY IN EVERY DETAIL

MODERN AND QUALITY ASSURED PRODUCTION

Swepac is certified according to ISO 9001 and 14001. Production is flow-based with a standardized working method in every assembly step. We use modern assembly tools, for example programmable torque wrenches for quality-sensitive assembly sections. Components are measured and tested before assembly, checklists are used for each machine along the assembly flow and each machine is test run as part of the production flow, all to achieve the quality requirements we and our customers have.

CAREFULLY SELECTED SUPPLIERS

The components are manufactured by subcontractors, selected with regards to quality, delivery consistency, environmental ambitions, and a desire to develop our machines further with us.

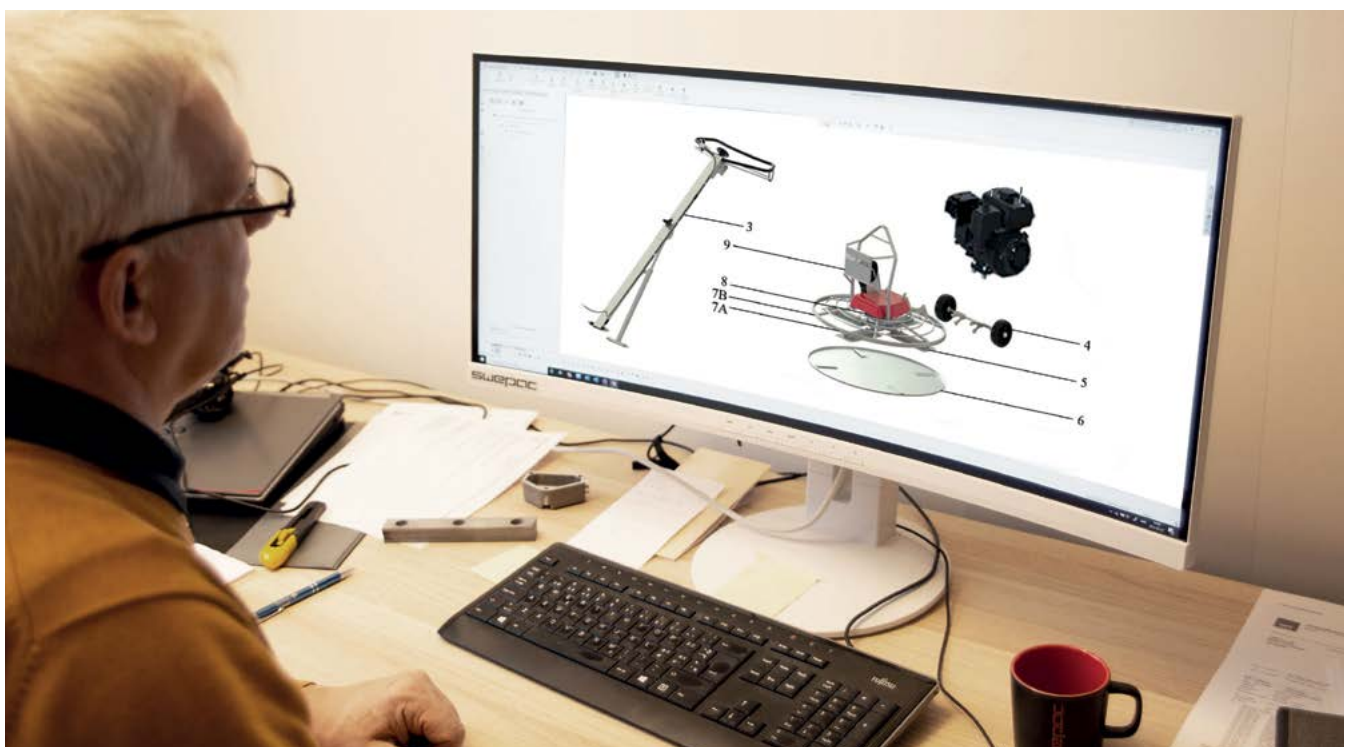



DESIGN & DEVELOPMENT

Swepac's products are designed and manufactured with quality and durability in focus. We use proven engines and components and over-dimensioned solutions in many respects to ensure quality in the tough environment in which the machines are being used.


A BUSINESS WITH SUSTAINABILITY IN MIND

As part of our ISO 14001 certification, sustainability is central to Swepac. We separate and reuse materials, liquids and packaging and optimize manufacturing processes and logistics from an environmental point of view. Our new factory building is energy efficient, and we are self-sufficient on electricity thanks to the solar panels on the roof.

A DIGITAL SPARE PARTS PORTAL AVAILABLE 24/7

Via Swepac's website, it is easy to get an overview of spare parts for each machine, which you then order from your local distributor. It is sufficient to enter the machine model name or serial number. You are

then guided through exploded views of the selected product. Simple and flexible.

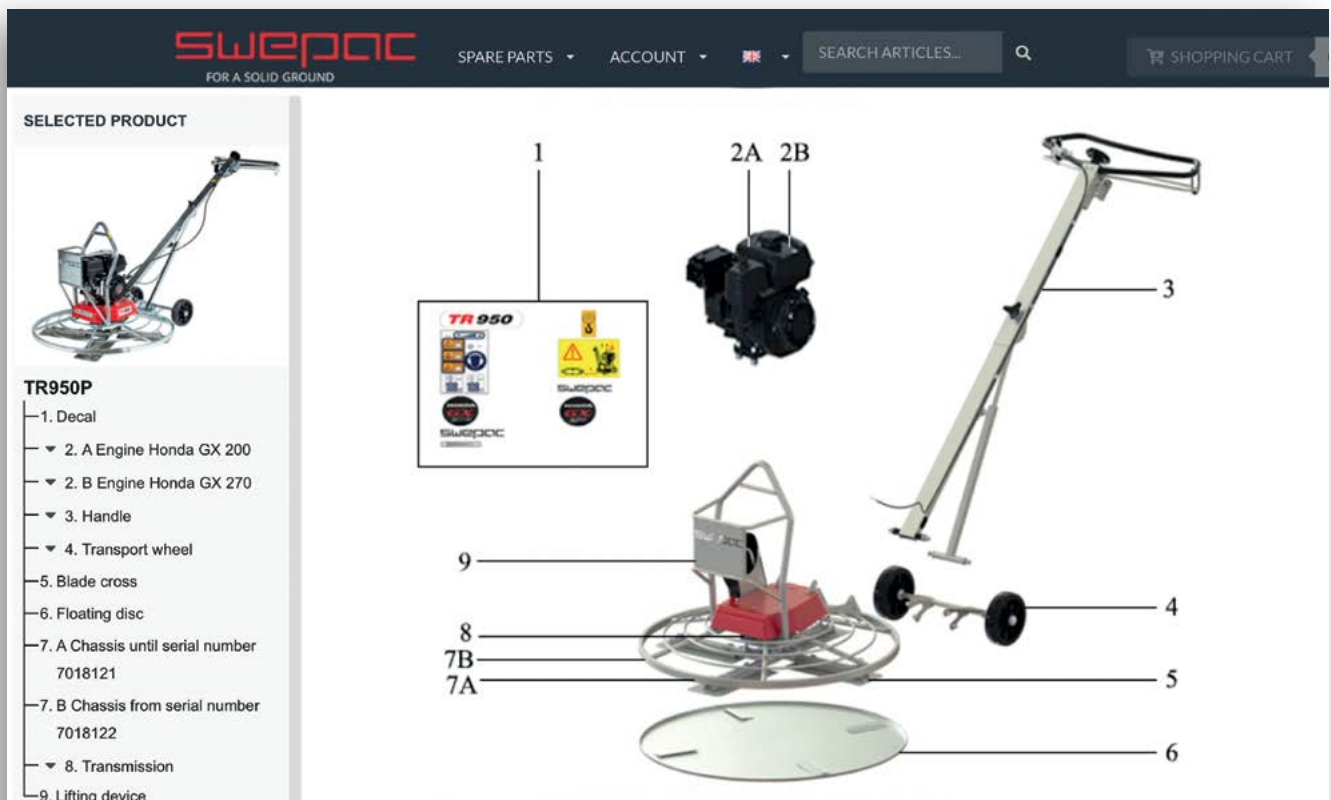



SWEPPAC

PERSONAL SERVICE AND HIGH AVAILABILITY



SWEPAC

FOR A SOLID GROUND

SWEPAC AB • BERGVÄGEN 7 • SE-341 32 LJUNGBY, SWEDEN
info@swepac.com • www.swepac.com